



Article

Investigation and Development the Modelling of Intermediate Temperature PEM Fuel Cell for Transport Applications

Fathi Eltayeb Abukhres^{1*}, Ali Algaddaf², Miloud Ouadi³

¹Renewable Energy Research Group, Department of Electrical and Electronic engineering, The Higher Institute of Engineering Technology Zliten- Libya

²PEM Fuel Cell Research Group, Centre for Hydrogen and Fuel Cell Research, School of Chemical Engineering, The University of Birmingham, Edgbaston, Birmingham B15 2TT, UK

³PEM Fuel Cell Research Group, Centre for Hydrogen and Fuel Cell Research, School of Chemical Engineering, The University of Birmingham, Edgbaston, Birmingham B15 2TT, UK

*Corresponding author: fathi_ly81@yahoo.com

Received: November 06, 2024

Accepted: January 20, 2025

Published: February 28, 2025

This is an open access article under the BY-CC license

Abstract: Proton-Exchange Membrane Fuel Cells (PEMFCs) have garnered significant attention due to their distinct advantages over other fuel cell technologies. These advantages include high efficiency, minimal environmental impact, and robust power generation capabilities, making PEMFCs highly suitable for both stationary and transportation applications. As a promising solution for mitigating climate change, PEMFCs contribute to the sustainability of the transportation sector while ensuring a reliable energy supply, provided that a continuous hydrogen source is maintained. This study presents a comprehensive review of Intermediate-Temperature Proton-Exchange Membrane (IT-PEM) fuel cells, a crucial advancement aimed at enhancing fuel cell performance under elevated operating temperatures. In an ideal scenario, gas crossover across the membrane in PEMFCs should be completely prevented. However, a minimal crossover rate—accounting for approximately 1–3% fuel losses—is observed, necessitating further investigation alongside other critical challenges associated with PEMFCs. To address these concerns, a theoretical model for IT-PEM fuel cells has been developed and remains an ongoing research endeavor. An extensive literature review reveals that a nanocomposite membrane with 15 wt.% additive content exhibits superior reliability for facilitating PEMFC operation at intermediate temperatures. Nevertheless, further research is required to enhance efficiency at both intermediate and high-temperature conditions, thereby improving CO tolerance and other gas interactions, while fully leveraging the benefits of IT-PEM technology for next-generation fuel cell applications.

Keywords: Proton-Exchange Membrane (PEM) fuel cell, Intermediate Temperature (IT-PEMFCs), Nafion Membrane, SPEEK Membrane, COMSOL software, Department of Energy (DoE).

1. Introduction

Proton-Exchange Membrane Fuel Cells (PEMFCs) have attracted significant attention from researchers and scientists over the past decade due to their numerous advantages, including structural simplicity, high power density, reduced harmful emissions, and superior energy conversion efficiency [1]. The proton-exchange membrane (PEM) serves as the core component of PEMFCs, playing a crucial role in proton transport and overall system performance [2]. Consequently, the development of an alternative membrane to replace the conventional Nafion membrane is imperative. The ideal membrane

should be cost-effective, exhibit high proton conductivity, and demonstrate operational stability at intermediate or elevated temperatures, while maintaining superior gas permeability properties.

Additionally, as indicated in [3], low methanol permeability is a critical requirement for improving membrane performance, particularly in applications involving direct methanol fuel cells (DMFCs). Addressing these challenges necessitates the exploration of advanced materials, such as nanocomposites and modified polymeric membranes, to enhance thermal and chemical stability, proton conductivity, and fuel crossover resistance. The ongoing pursuit of these advancements is essential for the next generation of high-performance, durable, and economically viable PEMFC membranes.

In term of the history and definition of PEMFCs, we can briefly describe according to the Department of Energy (DoE) in the United States [4,5], that PEMFCs have been commercialized for stationary application since 2001 and transport applications since 2003. However, PEMFCs still have several challenges such as issues of cross over, cost and durability besides that the challenges of the infrastructure of hydrogen fuel [5-8]. A fuel cell is simply defined as an electrochemical device that converts the chemical energy into electrical energy, which can be described as in Figure 1.

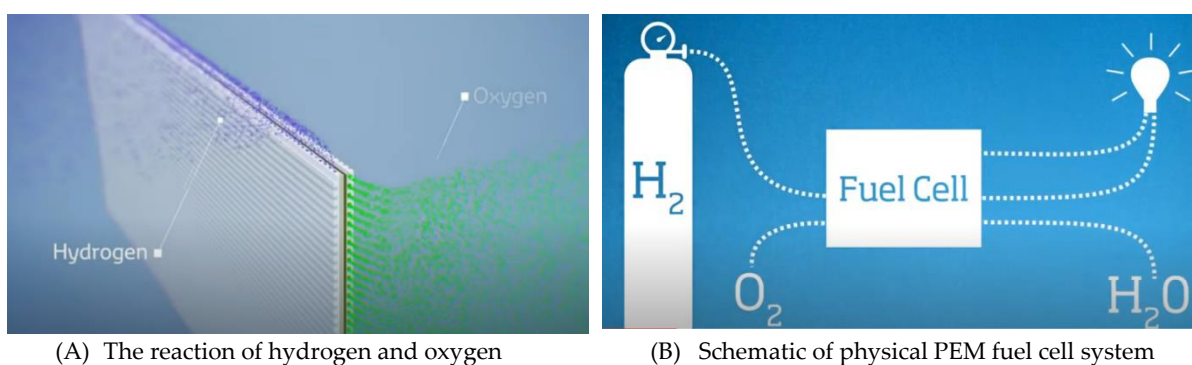


Figure 1. The basic chemical reaction of PEM fuel cell.

In the electrochemical techniques for PEMFCs, it is important to discuss mass transport and proton exchange proton conductivity. There are several methods to assess the mass transport properties of the membrane as presented by several researchers [5], [9-13]. It would be useful in this paper to discuss these methods briefly. These techniques include the volumetric method, gas chromatography techniques, time-large approaches, and electrochemical monitoring methods. The volumetric techniques determine the permeability coefficient of H_2 and O_2 in Nafion membrane as presented by [8], where high pressure is applied to one side of Nafion membrane, and from another side of the membrane, the permeating flux of gas is estimated. But in the time-large approaches, the time to fill up fixed downstream volumes is estimated while the concentration change is measured in gas chromatography techniques. The Membrane Electrode Assemblies (MEA) is assembled and on the one side, is exposed to an acid solution while on another side, the reactive gas is supplied and estimated overtime to determine the diffusion factor and solubility coefficient of the membrane.

This paper provides a comprehensive review and critical evaluation of various approaches and techniques related to mass transport properties in Proton-Exchange Membrane Fuel Cells (PEMFCs). Additionally, it outlines the methodological framework for experimental investigations. The paper is systematically structured into several sections to ensure a logical progression of concepts and findings.

Initially, the study presents the state-of-the-art advancements in membrane materials, emphasizing their suitability for intermediate-temperature PEMFC (IT-PEMFC) applications. This is followed by an extensive review of related research and theoretical background, providing essential context for the study. Subsequently, the paper delves into the methodology and modeling strategies employed in the development and optimization of IT-PEMFCs, detailing key parameters influencing performance. The discussion further extends to the evaluation of experimental results and the insights derived from ongoing research efforts. Before concluding, the paper outlines key recommendations and unresolved

challenges, highlighting future research directions to advance the efficiency, durability, and commercial viability of IT-PEMFCs.

2. State of the Art of Material to Allow PEMFCs to Operate at Intermediate Temperature

In the section above we discuss mass transport. In this section, we will present some previous works and then proton conductivity will be discussed. The conventional Nafion membrane is required an external humidification complex system that will increase the weight and complexity of PEMFCs. These disadvantages can be overcome by adapting the self-humidifying membrane that helps Pt-Cs2.5 catalysts in the membrane to combine the permeable H₂ and O₂ to produce water and humidifying the membrane [14]. It helps hygroscopic metal oxides [SnO₂ or TiO₂] to absorb H₂O and accordingly enhance proton conductivity [14-16], and lastly, it helps to increase the proton conductivity of membrane under dry operation condition such as Zirconium phosphate [17,18].

It is important in this paper to discuss the framework for the self-humidifying system and preparation procedures. The material and preparation of the Pt.Cs2.5H0.5Pw12O40 catalysts were presented by [2], and also [19] described these techniques. The material of Cs2.5H0.5Pw12O40 can be varied as presented by [19]. The Pt.Cs2.5H0.5Pw12O40 was synthesized with platinum in catalyst surface and then synthesized by titration approach [2]. One alternative membrane is SPEEK membrane among other types such as Poly Ether Sulfone (PES) [20] Polybenzimidazole (PBI) [21] and other as shown in Figure 2. The SPEEK membrane which is converted from PEEK has good mechanical properties and high thermal stability [2], and [22].

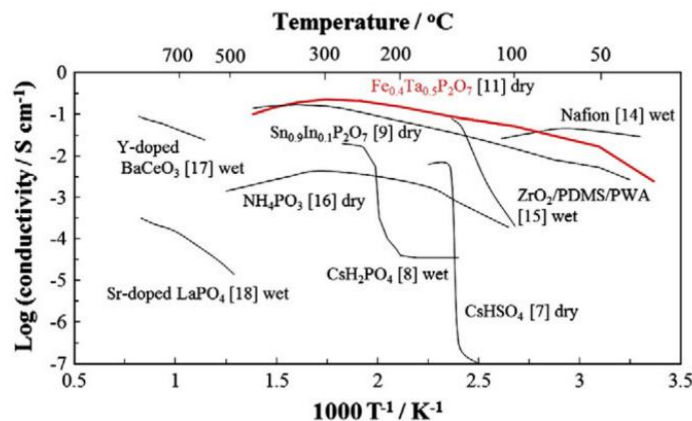


Figure 2. Effective of using Fe_{0.4}Ta_{0.5}P₂O₇ at an intermediate temperature and compare with other materials for MEAs [23].

The SPEEK is made by electrophilic substitution of the sulfonic acid groups in the polymer backbone through sulfonation chemical reaction as presented by [2], [24] and other authors in references [25,26]. It is important here to clarify that the proton conductivity of SPEEK is enhanced by expanding the Degree of Sulfonation (DS). But the increasing of DS causes the deteriorated of mechanical strength because the water content becomes high and the membrane will high swelling. Therefore, we have to increase the DS until the optimal value where good proton conductivity and favourable membrane strength should be accomplished [27]. According to [28], the DS is controlled by varying temperature reaction time and acid concentration.

The SPEEK/Pt.Cs2.5H0.5Pw12O40 non-fluorinate self-humidifying nanocomposite membranes were developed and fabricated by [2] to use with dry reactant gases. Several tools that were used such as X-Ray Diffraction (XRD) was performed using a PHILIPS PW-1800 diffractometer to determine the particles size of catalyst samples. While X-Ray Fluorescence (XRF) analysis beside other Fourier Transforms Infrared Spectroscopy (FT-IR) analysis and Scanning Electron Microscopy (SEM) are utilized to find the quantity of minimizing platinum on the Cs2.5H0.5Pw12O40 catalyst supports.

Transmission Electron Microscope (TEM) is adapted to show whether the catalyst particles are uniform or not. These are all testing and analysis tools are used to study membrane characterization. Figure 3 shows the changes in the weight of the sPEEK/H3PW12O40 and sPEEK/Pt-Cs2.5 nanocomposite membranes as a function of immersion time.

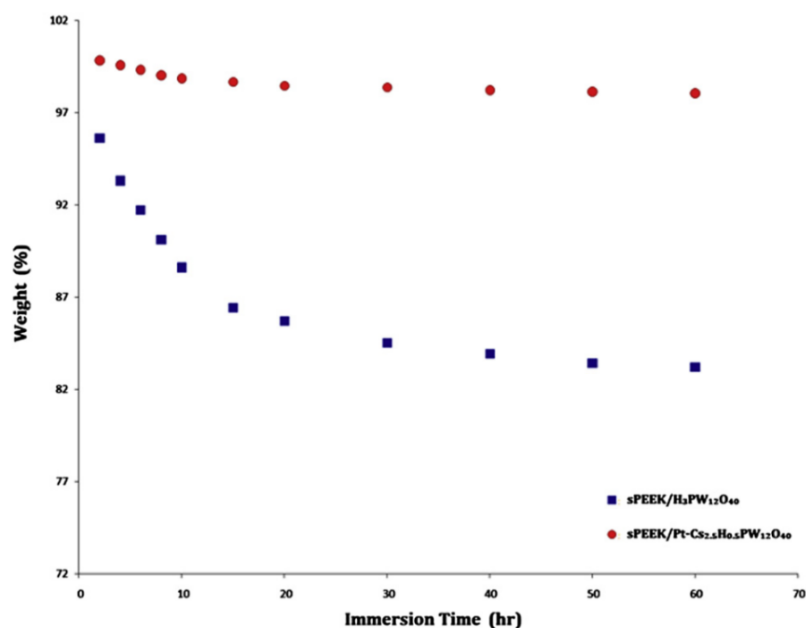


Figure 3. Variation of the weight of the sPEEK/H3PW12O40 and sPEEK/Pt-Cs2.5 nanocomposite membranes against immersion time [2].

The analysis of steady-state and transient of PEMFCs with analysis of internal humidification and water management by node-side modulation were presented by [29]. However, there are several assumptions and phase changes of water do not take into consideration of authors. There is a great matching between the model and the experimental results and several mathematical equations that could be useful to design a numerical model.

3. Related Works and Background

This section has several subsections that are varied to increase understanding of PEMFCs. Then we can improve the performance of PEMFCs. Recently, PEMFCs are becoming very important due to advantages over other types of fuel cells. These advantages of PEMFCs are high efficiency, low pollution power generator stationary and transportation applications [30]. The membrane accounts approximately 6%-30% of the cost of PEMFCs [5], [13], [31,32] claimed that “the inorganic proton conductors could be silica, Heteropolyacids (HPAs), layered zirconium phosphates, and liquid phosphoric acid”. The silica is needed a high pressure to sustain 100% RH for high proton conductivity above 100°C. While, the use of HPAs an example Phosphotungstic Acid (PTA) into polyelectrolyte membranes that can improve both proton conductivity and effective of PEMFCs above 100°C; could cause flooding for membrane. However, to prevent HPA leaching, amine-functionalized mesoporous silica can be utilised to immobilize PTA in Nafion membranes as presented by [13] and [32]. The composites of SPEEK with HPAs show increased proton conductivity at elevated temperatures when fully hydrated and excellent thermal and electrochemical stability, however, the cost of material is very high. We can extend the discussion by focusing on organic/inorganic hybrid membranes from acid-doped PBIs and other polymers as part of future work.

a. Basic Background in Chemistry

Since we study IT-PEMFCs and the conventional PEMFCs operate at low temperature, it is important to highlight the conversion in the temperature in this paper where some academic works are presented

in kelvin while others in Celsius. Hence it would be useful to study the conversion relation. To convert the temperature from Celsius to kelvin, the following formula is used and vice versa [33]:

$$T(K) = T(^{\circ}C) + 273.15 \tag{Eq. 1}$$

Density (ρ) is well-defined as mass (m) per unit volume (v) of material which is given by [33]:

$$\rho = \frac{m}{v} \tag{Eq. 2}$$

While the concentration is expressed by weight per volume and the best description for the density can be presented as shown in Figure 4.

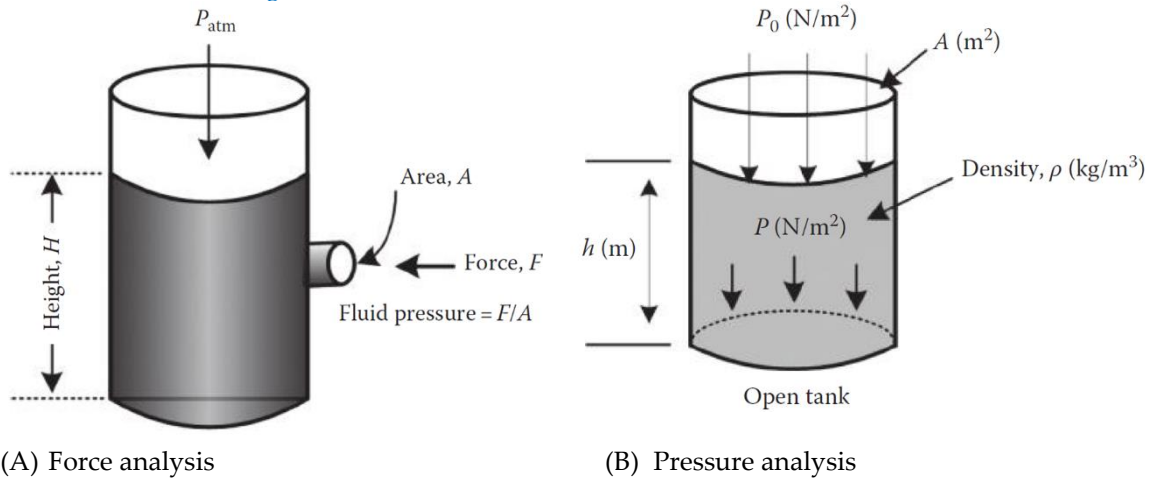


Figure 4. Analysis of pressure and force at the bottom of an open tank [33].

The dehumidification is done with internal or heating coils which help to reduce the level of humidity in the air or gas steam. While the humidifier is to increase the amount of moisture by allowing the water to evaporate. The characteristics of humidifier are the feed gas is in saturated and fluid is vaporized but the exit products may or may not be saturated as illustrated Figure 5.

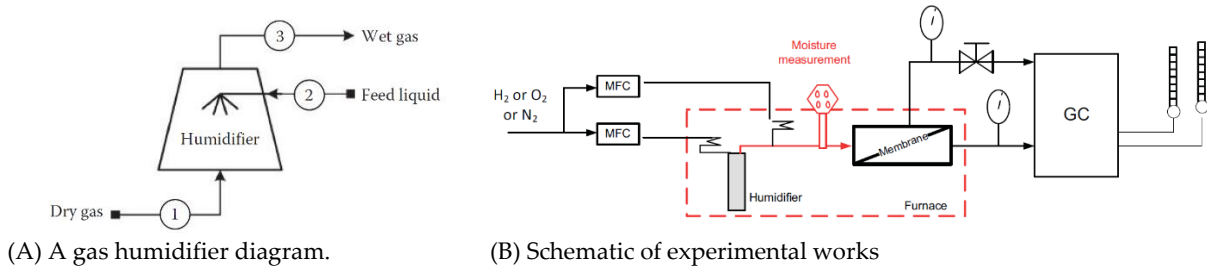


Figure 5. A gas humidifier diagram [10,35].

While Figure 6 shows the multi-system process and different techniques such as recycle. A recent study [33] described these processes of purge and others in more details.

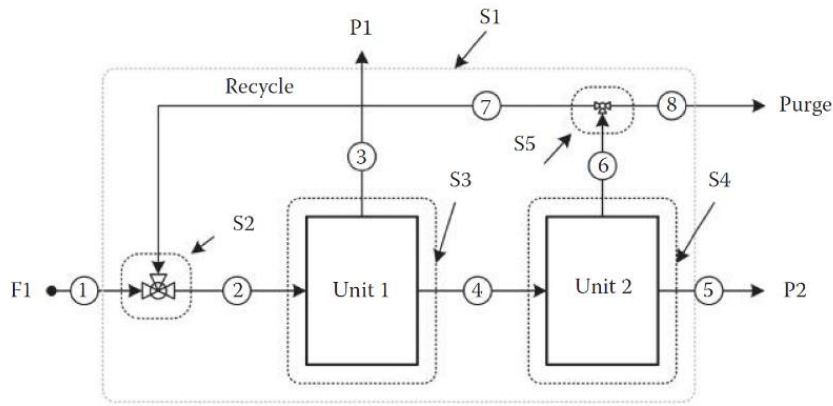


Figure 6. Multi-systems process [33].

b. Stoichiometric Equation, Coefficient, and Ratio

The stoichiometry is very important in the chemical term that the stoichiometry includes stoichiometric equation, stoichiometric coefficient, and the stoichiometric ratio [35].

c. Study Phase Changes/Phases of Material

Phase changes are utilized in the separation and purification process. Also, the pressure or temperature condition could be used to describe the state of material either solid, gas or liquid, which help to understand the behaviour of materials. Different names are given for materials when they stay in coexist state such as vapour and liquid coexist. The conventional standard is on the liquid-solid line, the temperature is called the freezing/melting point while on vapour-liquid line, the temperature is known as the boiling point, and the pressure is the vapour pressure [35]. On the other hand, on the vapour-solid line, the temperature is called the sublimation point, an example is shown as in Figure 7.

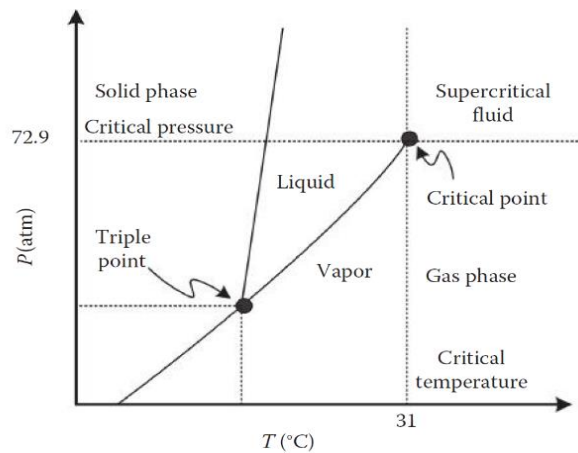


Figure 7. CO₂ phase diagram to understand the material behaviour [35].

d. State of Art of the Aass Transport

The SPEEK membrane was prepared while the Nafion 117 membrane was obtained from Quintech Company in German. The membranes either SPEEK or Nafion 117 were sandwiched between gas diffusion electrodes (Pt-Free ELAT) and pressed. The pressure 58.8 bar and 26 bar were applied to SPEEK and Nafion respectively. Then impedance spectroscopy with a Solartron SI 1260 was used to determine proton conductivity. The RH was determined by calculating the pressure of saturated water vapour (P) at the cold temperature (T_{cold}) and the hot (T_{hot}) compartment which is given by [5]:

$$RH = \frac{P_{H_2O}(T_{cold})}{P_{H_2O}(T_{hot})} \cdot 100\% \tag{Eq. 3}$$

In this direction. It is important to study Stoichiometric PEM fuel cell because we can determine how much power per mass of hydrogen that we can get. Stoichiometric of PEM fuel cell is given by [36]:



Where 2 moles of H_2 would need one mole of O_2 to produce water which is required 4F of charge that is given as:

$$\text{Change} = 4F \times \text{amount of } O_2 \quad \text{Eq. 5}$$

By dividing one the time:

$$O_2 \text{ usage} = \frac{I}{4F} \left[\frac{\text{moles}}{s} \right] \quad \text{Eq. 6}$$

This result helps to find the relation between the power of fuel cell and O_2 usages. But the O_2 used is required from the air which is given by Eq. 7.

$$\text{Air usage} = 3.57 \times 10^{-7} \times \lambda \times \frac{P_c}{V_c} \left[\frac{kg}{s} \right] \quad \text{Eq. 7}$$

Where λ is the stoichiometry and V_c is the voltage of cell which is 0.65 V that is used as a good approximation and periodic table in chemistry were used to find the molar mass of O_2 . Since we focus on the humidity in PEM fuel cell, the difference between the inlet flow rate of air and the outlet rate will give the exit airflow rate as Eq. 8 [36] :

$$\begin{aligned} \text{Exit air flow rate} &= \text{air inlet flow rate} - O_2 \text{ usage} \\ \text{Exit air flow rate} &= (3.57 \times 10^{-7} \times \lambda - 8.29 \times 10^{-8}) \frac{P_e}{V_c} \left[\frac{kg}{s} \right] \end{aligned} \quad \text{Eq. 8}$$

While the rate of usage of H_2 by using the molar mass of hydrogen from the periodic table, is given by:

$$H_2 \text{ usage} = (1.05 \times 10^{-8}) \frac{P_e}{V_c} \left[\frac{kg}{s} \right] \quad \text{Eq. 9}$$

This is very valuable and beneficial to determine the electrical power that can be created from the volume of hydrogen [36]. However, this analysis does not consider the reformed hydrocarbon. Therefore, at high temperature, PEM fuel cell will allow and tolerate for carbon monoxide which is required to take into consideration with other gases. Lastly, the rate of water production in PEM fuel cell is produced based on stoichiometric equation and molecular mass of water by:

$$\text{Rate of water production} = (9.34 \times 10^{-8}) \frac{P_e}{V_c} \left[\frac{kg}{s} \right] \quad \text{Eq. 10}$$

$$H_2 \text{ usage} = \frac{Pe}{2V_c F} \left[\frac{\text{moles}}{s} \right] \quad \text{Eq. 11}$$

Some water could be used in internally reformation process such as methane in the internally reformed process. As was pointed out in the introduction of this paper, the techniques of mass transport include the volumetric method, gas chromatography techniques, time-large approaches, and electrochemical monitoring methods. In general, the current in the fuel cell is controlled by the rate of electron transfer and transport of material to and from the electrode surface either the reductions or

oxidation processes [37,38]. There are forms of mass transport that are convection, diffusion and migration. The conversion reaction occurs at electrode surface while diffusion occurs as a random walk model and it is given by Fick laws as follow [39].

$$J_0 = -D_0 \left(\frac{\partial C_0}{\partial x} \right) \quad \text{Eq. 12}$$

Where J_0 is the rate of movement or diffusional flux and D_0 is the diffusion factor and $\frac{\partial C_0}{\partial x}$ is the concentration gradient and can be expressed in a function of time as Fick's second law:

$$\frac{\partial C_0}{\partial t} = D_0 \left(\frac{\partial^2 C_0}{\partial x^2} \right) \quad \text{Eq. 13}$$

Where x is the distance to an electrode surface. The steeper the change in concentration, it will be the greater the rate of diffusion. The convection is the second approach of mass transport which can be a pump, a flow of gas or even gravity which are required knowledge of turbulent or laminar flow. The migration is the final form of mass transport which is an electrostatic effect that is either attracted or repelled.

e. Review of Ion Conductivity of PEMFCs

The review of ion conductivity is conducted in this section as it is very important in improving the performance of PEMFCs. The comparison between different Nafion membrane material is presented. [40] focused on Nafion-1100 annealed at 120 °C for 15 h and it was claimed that Nafion 1100 is enough to operate at $RH \leq 96\%$ for the range of temperature 100-120°C. The Nafion 117 membranes were studied at high-temperature range by using the matrix counter-pressure index and by using a factor to determine the density of inner proton solution. The operating of PEMFCs at 100-120°C, it is highly desirable in both automotive and cogeneration applications [41-44]. However, all the ionomer membranes are unable to operate at a temperature above 80-90 °C due to rapid decreasing of performance of PEMFCs at a temperature above 90 °C [45, 46]. One study to attempt to overcome of the ionomer instability of membrane was presented by [40] and some researches were focused to understand the thermal instability of ionomers [46,47] and annealing and/or cross-linking techniques [48-50]. The Nafion-117 membranes are treated for an hour each step as follows [40]:

- boiling 3% solution of hydrogen peroxide
- It was boiled with 0.5 M sulphuric acid
- lastly, it was boiled in the distilled water

The conductivity at the intermediate temperature above 90 °C was increased by 0.095 [S/CM] the conductivity at the low temperature of PEMFCs. However, at 100-120 °C, there is no attempt by [51], although synopsis of Nafion membrane was conducted. Also, the most tested was in situ, while in ex-situ tested of the conductivity was significantly scattered. The Nafion 112 mandarin gave better

performance if it is compared with other commercial Nafion 117, 115, and 1135 as described in Figure 8.

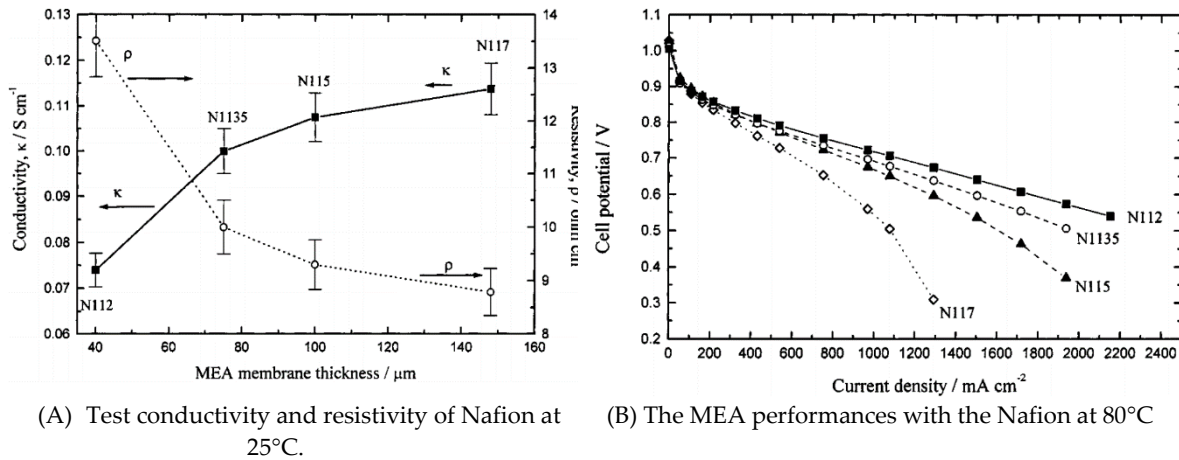


Figure 8. Different Nafion1100 EW membranes tests [51].

According to [52], the Nafion membrane is used in PMFCs and Direct Methanol Fuel Cells (DMFCs) which show the good thermal stability and high proton conductivity due to a perfluorinated polymer materials below 100 °C and fall hydrated conditions. But above 100 °C these benefits will be decline and the fuel will cross over and also the high cost of material will be another issue. Therefore, the Poly Ether-Ether Ketone (PEEK) is presented as the most used as an alternative for Nafion membrane and we can summarize three modified types that are i) PEEK electrophilic sulfations (SPEEK), ii) S-PEEK and non-formulation polymers blundering and iii) S-PEEK heteropolar compounds and poly-ether mide doping with inorganic acids [52-57].

The iron triangles are used in the fuel cell to describe three important characteristic or properties that are a performance of fuel cell, cost and durability [52]. This iron triangle should be taken into consideration beside other feature or functions such as high proton conductivity (σ) low H₂ crossover and low electronic conductivity and high stability of chemical, thermal and mechanical of the fuel cell.

According to [52], victrix company produce PEEK polymer that is modified with sulfonic acid groups such as sulfonated PEEK, PEK, PEEK-WC and PEEKK and also SPEEK. These are modified as alternative Nafion membranes. But some of these are suffering from low proton conductivity. However, S-PEEK becomes really competitive and alternative for the Nafion membrane.

One of a great study by [2], focused on Self-humidifying nanocomposite membranes. Different tests such as FTIR, XRD, SEM-EDXA and TEM measurements were conducted on the different samples. It was found that the self-humidifying nanocomposite membranes with DS=65.12% and the amount wt.% Pt within catalyst with having 1.25 wt.% Pt within catalyst is the best PEM for FCs applications even better than the Nafion-117.

The same group research above focused on self-humidifying nanocomposite membrane [58]. The residual weight of the nanocomposite membrane increased to 40 % after the Fenton's test and also the oxidative durability was improved [9], presented also another great study where the current was set as stepwise and the voltage and temperature are observed as shown in Figure 9. One observed and the most interesting point is when the temperature is varied between 16-18 hours, the voltage is dropped

at 95. This is required more investigations where other points, when either the current or temperature are varied the voltage, is changed accordingly.

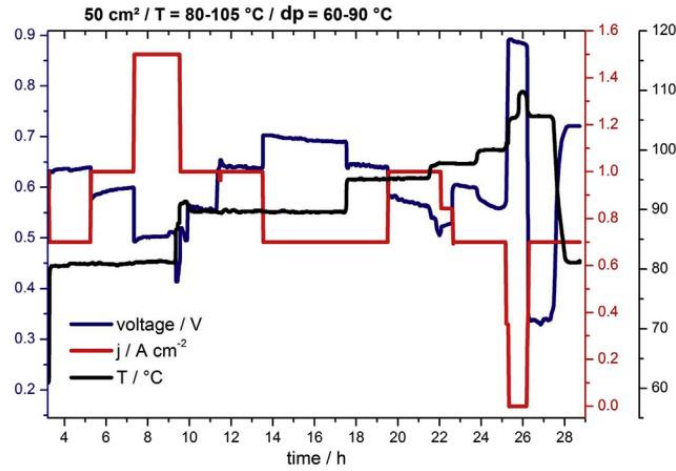


Figure 9. The current setup as stepwise with time, then the voltage responds along with the variation of temperature was varied in-between 80-110 C [9].

4. Methodology and Modelling of the PEM Fuel Cell at Intermediate Temperature

The modelling of gas crossover of PEMFCs with a phosphoric acid-doped polybenzimidazole membrane was developed where operating temperature, current density and gas crossover diffusivity of the membrane were varied [59]. The model of PEM fuel cells to study the effect of relative humidity was developed by [11]. The model helps to contribute to advection and diffusion on liquid water and heat transport [60]. The mathematical equation and interaction were presented in Figure 10.

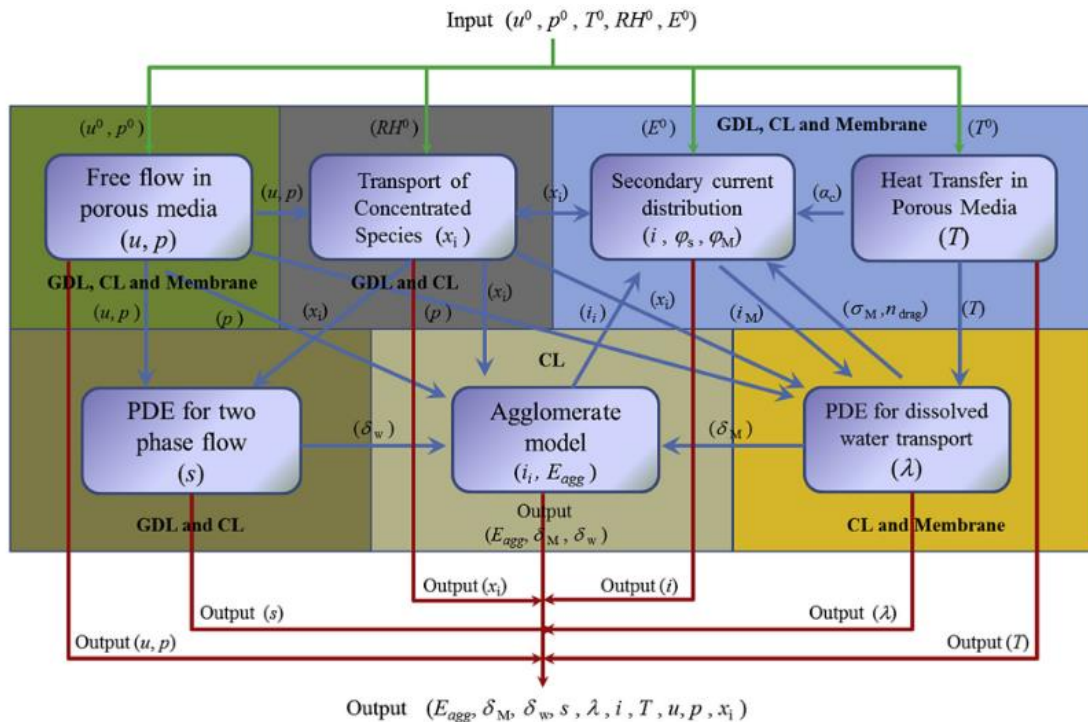


Figure 10. Different factors to represent the mathematical model of PEMFCs [60].

Also, the COMSOL software 4.4 was used and most of the results focus on the relative humidity. However, the outcomes show that the Peclet number which demonstrates advection does not affect the liquid water transport in the porous electrode. We could adopt similar techniques of simulation using

COMOSOL as discussed by [61]. The comparative analysis between the 2D and 3D model of PEMFC was presented at 120°C [62] presented the study of modelling PEMFCs with the serpentine flow using COMSOL 4.3. as shown in Figure 11.

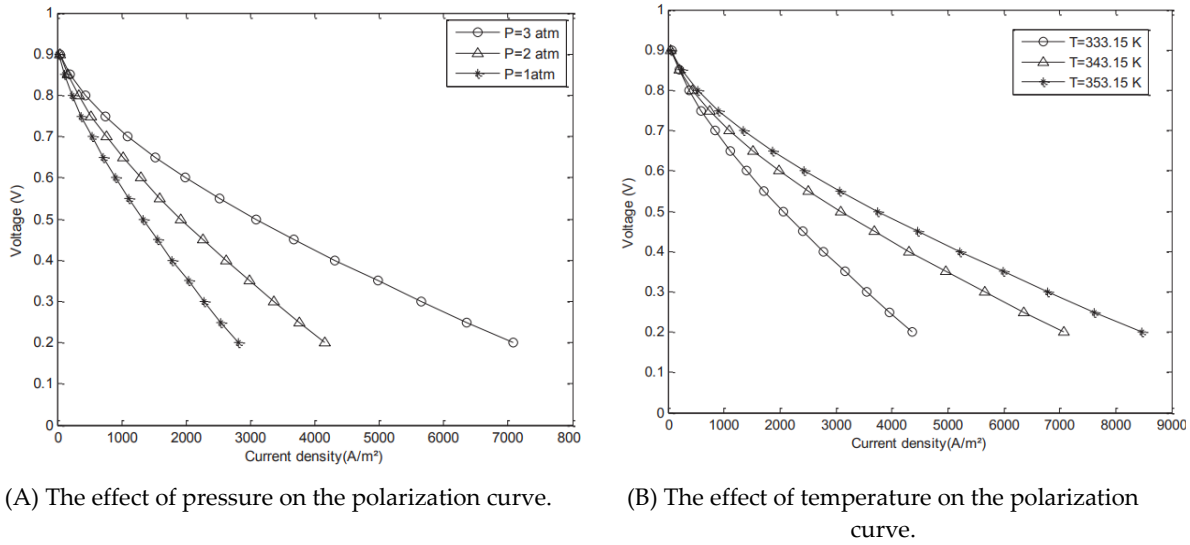


Figure 11. Effects of changing temperature and pressure in PEMFCs [62].

Thereby, it is shown that pressure and temperature conditions are very important characteristic in PEMFCs. Therefore, we focus on the intermediate temperature. As PEMFCs provide high efficiency and its carbon-free by converting the H₂ through the chemical reaction to electricity, it is important to focus on aspects of PEMFCs in this research. One of the most important aspects is the humidifying system, which allows the PEMFCs to give the greatest performance and increase the water content and chemical reaction. However, this external humidifier causes complexity of PEMFCs and extra cost in specifically the transport applications where the space is limited in vehicles. To overcome these problems, the self-humidifying system for PEMFCs are proposed at intermediate temperature. One of the greatest study in this field that is presented recently, the review study by [63], which is classified the material into three types that are proton-conductive materials, inorganic materials and carbon-based additives. Therefore, it is important to present a composition between self-humidifying PEMs and different additive in term of the performance, and stability, gases crossover, proton conductivity, water uptake and overall durability.

Table 1. Some challenges and remedies of self-humidifying of PEM fuel cell [63].

Challenges	Remedies
High ohmic resistance (hygroscopic additives)	<ul style="list-style-type: none"> The utilization of smaller additives with an enhanced surface area can significantly optimize performance by facilitating improved ionic conductivity. Additionally, integrating a hybrid composition of proton-conductive and hygroscopic materials can effectively enhance the overall electrochemical properties. Furthermore, the functionalization of these materials can augment the density of proton-conductive sites, thereby improving charge transfer efficiency and system stability.
High ohmic resistance (proton conductors)	<ul style="list-style-type: none"> The effectiveness of the additive or catalyst is highly dependent on its precise concentration, as both insufficient and excessive amounts can detrimentally impact performance. Therefore, an optimal dosage must be carefully determined to achieve the desired electrochemical properties while minimizing inefficiencies.
High ohmic resistance	<ul style="list-style-type: none"> Regardless of the specific conditions, the use of thinner membranes can enhance proton conductivity by reducing ionic resistance and facilitating more efficient charge transport, thereby improving overall system performance.

Mechanical instability of ultra-thin membranes	<ul style="list-style-type: none"> Structural integrity can be enhanced through reinforcement with polytetrafluoroethylene (PTFE) support, which improves mechanical stability and durability under operational conditions.
High gas cross-over rate and low OCV value	<ul style="list-style-type: none"> The implementation of multilayer structures can effectively mitigate the permeation of reactants, thereby enhancing system efficiency and stability. Additionally, ensuring a uniform distribution of catalysts facilitates the availability of abundant recombination-active catalytic sites, optimizing electrochemical performance and reaction kinetics.
Agglomeration or migration of additives	<ul style="list-style-type: none"> Addressing this issue can be achieved through surface modification or the functionalization of additives, which enhances their dispersion, stability, and interaction within the matrix, thereby improving overall material performance and efficiency.
Mechanical brittleness	<ul style="list-style-type: none"> Enhancing the dispersion and ensuring optimal compatibility with the polymer matrix can significantly improve the mechanical resilience of proton exchange membranes (PEMs), thereby increasing their durability and operational stability under varying conditions.
Electron short circuit	<ul style="list-style-type: none"> The implementation of a multilayer design can effectively mitigate this issue by enhancing structural integrity and performance stability. Additionally, functionalization strategies can address electron transfer inefficiencies, facilitating more efficient charge transport. Moreover, platinum (Pt) particles can be stabilized within a polymeric matrix possessing a positive charge, thereby improving their dispersion, catalytic activity, and overall electrochemical performance.

It can be used the COMSOL to study all types of fuel cells and physical properties include current distribution in electrodes and electrolytes, gas-phase mass transfer, thermodynamics, multiphase and porous media flow and heat transfer in single, two or multiply phases. In COMSOL, we can model single and two phases of laminar flow. Also, the heat transfer in solids, fluids and porous media can be modelled as shown in Figure 12. At normal pressure and low temperature, the E , A and i_0 are given by 1.2 V, 0.06 and 0.04 [mA/cm²] respectively [36]. Hence, we can draw the polarization curve in theory as follow:

Ohmic losses could be the losses in a fuel cell that are created due to the resistance to the flow of ions in the electrolyte and the electrical resistance of the electrodes. These ohmic losses should be reduced as much as possible where it can be done by manufacturing the electrolyte as thin as possible and avoiding the crossover issue. Also, the electrodes should be designed with the highest possible conductivity material besides the optimal design of BPPs [36].

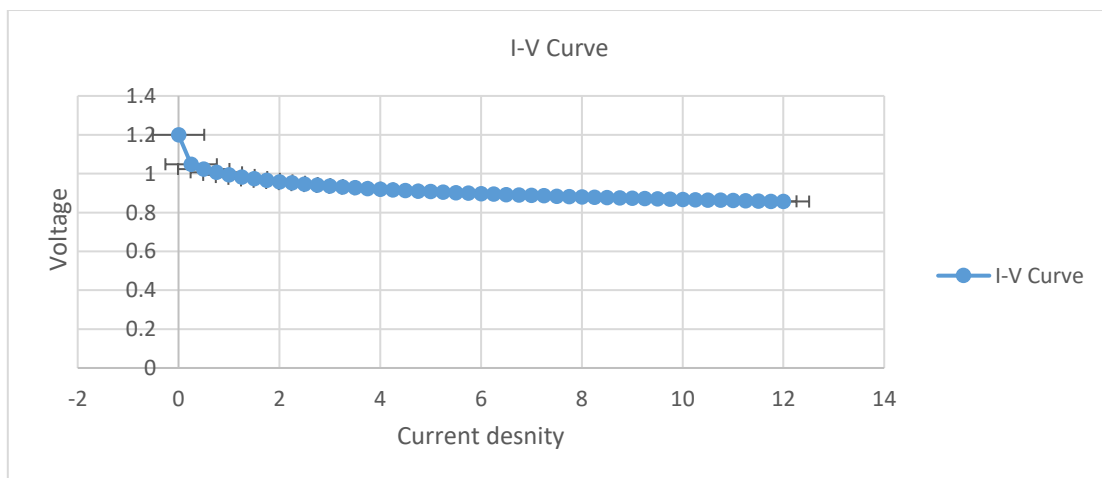


Figure 12. Modelling of PEM fuel cell by varying current and observe voltage numerically.

Figure 13 illustrates the computational modeling of an Intermediate-Temperature Proton Exchange Membrane (IT-PEM) Fuel Cell using COMSOL Multiphysics software. It presents a three-dimensional schematic of the fuel cell structure, highlighting key components:

- Flow Channels: These structures facilitate the transport of reactant gases (hydrogen and oxygen/air) to the electrodes and the removal of byproducts.
- Gas Diffusion Layers (GDLs): Positioned between the flow channels and porous electrodes, these layers ensure uniform gas distribution and effective water management.
- Porous Electrodes: These layers contain the catalyst necessary for the electrochemical reactions that generate electricity.
- Membrane: The central proton-conducting component that enables the transport of hydrogen ions while acting as an electronic insulator to prevent short circuits.
- Inlets and Outlets: These features indicate the entry and exit points of reactant and product gases, facilitating mass transport.

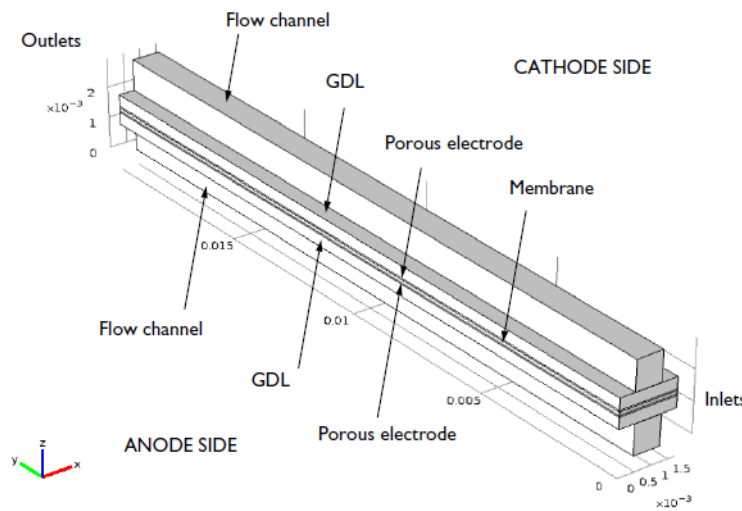


Figure 13. Modelling IT-PEM fuel cell in COMSOL software.

The labeled dimensions in the figure represent various structural aspects of the fuel cell, ensuring accurate modeling of performance characteristics such as mass transport, electrochemical reactions, and thermal management in COMSOL. The results of the modelling system are shown in Figure 14, Figure 15, and Figure 16.

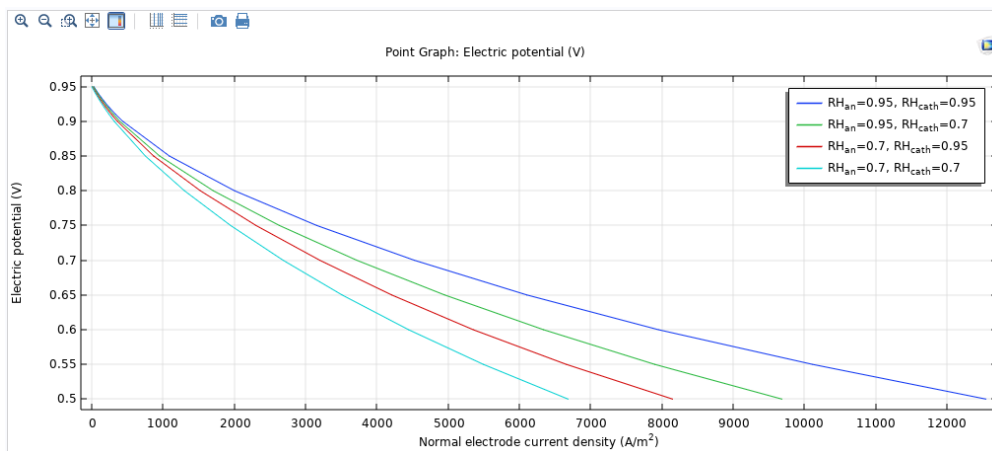


Figure 14. Performance of modelling PEM fuel cell at 80 °C.

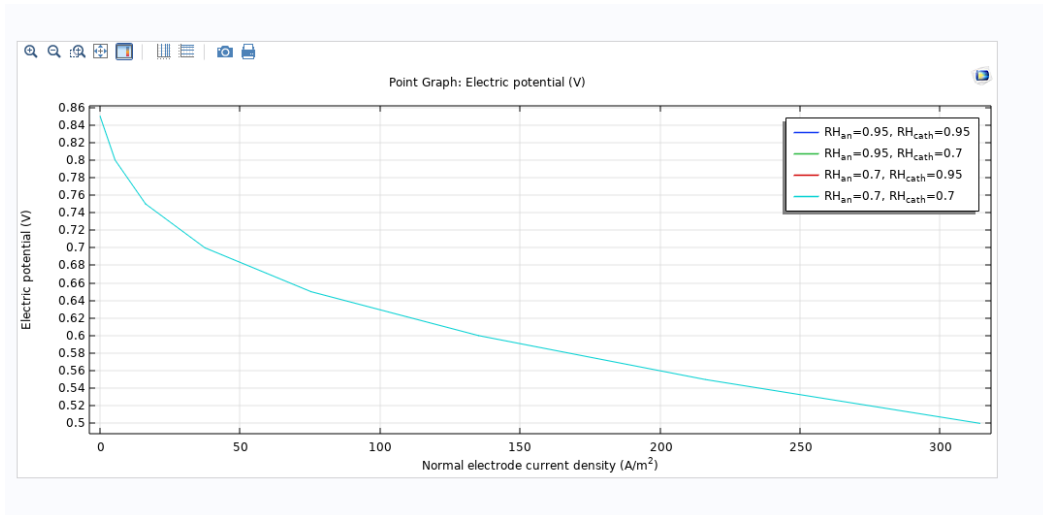


Figure 15. Response of IT-PEM fuel cell at 110 °C.

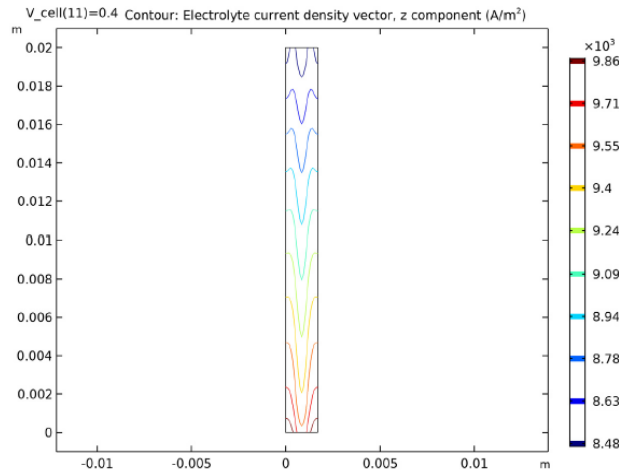


Figure 16. Modelling of ionic current in PEM fuel cell.

This model explores the transport of reactants and water at a high-temperature PEMFC. The model incorporates mass and momentum transport phenomena in the Bipolar Plates, porous electrodes, and GDLs. In addition to electrochemical currents in the GDLs, the porous electrodes, and the PEM [64,65].

5. Evaluation and Finding Outcomes

While, the membranes of SPEEK were tested at a temperature between 120-180 °C by [66], where FTIR, TGA and AFM were used. Also, chemical stability, hydrogen permeability proton conductivity and water uptake were investigated where annealing dominated samples are more stable and more homogenous and better proton conductivity than the samples of cross-linking dominated. SPEEK membrane was treated with higher Residual Solvent (RS) value which was determined by Eq. 14 and 15 [66,67]:

$$m_{SPEEK \text{ in cast solution}} = m_{SPEEK \text{ in original solution}} \times \frac{m_{Cast \text{ solution}}}{m_{Original \text{ solution}}} \tag{Eq. 14}$$

$$RS(\%) = \frac{m_{Cast \text{ membrane}} - m_{SPEEK \text{ in cast solution}}}{m_{cast \text{ membrane}}} \times 100 \tag{Eq. 15}$$

Where $m_{original \text{ solution}}$ is the mass of prepared SPEEK solution, $m_{Cast \text{ solution}}$ is the mass of the SPEEK solution in the petri dish, $m_{SPEEK \text{ in original solution}}$ and $m_{SPEEK \text{ in cast solution}}$ are the mass of SPEEK

in the original and cast solution, respectively while $m_{Cast\ membrane}$ is the mass of the final prepared membrane with the desired amount of RS [66]. Three articles are recommended, which could be worth to investigate in this research. These are self-humidifying nanocomposite membranes based on SPEEK, durable sulfonated partially fluorinated polysulfones as the membrane for PEMFCs [68] and effect of Pt-Cs2.5H0.5PW12O40 catalyst addition on the durability of self-humidifying nanocomposite membrane based on SPEEK [58].

Although, nanocomposite 15 %wt. (1.25%pt) at temperature 60°C, humidified reactants better than Nafion -117 and SPEEK (DS=65.12%) even nanocomposite at dry reactants better than both Nafion-117 and SPEEK membranes [2], it is only the test at 60 °C as shown in Figure 17, and other studies by [69] shows C-SPEEK/HPW/GO is better than C-SPEEK while we are interested in the operation of PEMFCs at an intermediate temperature between (80-120°C). The article [2], approved that “in single cells that employed the sPEEK/Pt-Cs2.5 self-humidifying nanocomposite membranes exhibited higher cell OCV values and cell performances than those of plain SPEEK membrane and Nafion-117 membrane under dry or wet conditions and showed good water stability in the aqueous medium”. It would be useful to investigate and test SPEEK/Pt-Cs2.5 self-humidifying nanocomposite membranes at an intermediate temperature and compare with other Nafion membrane.

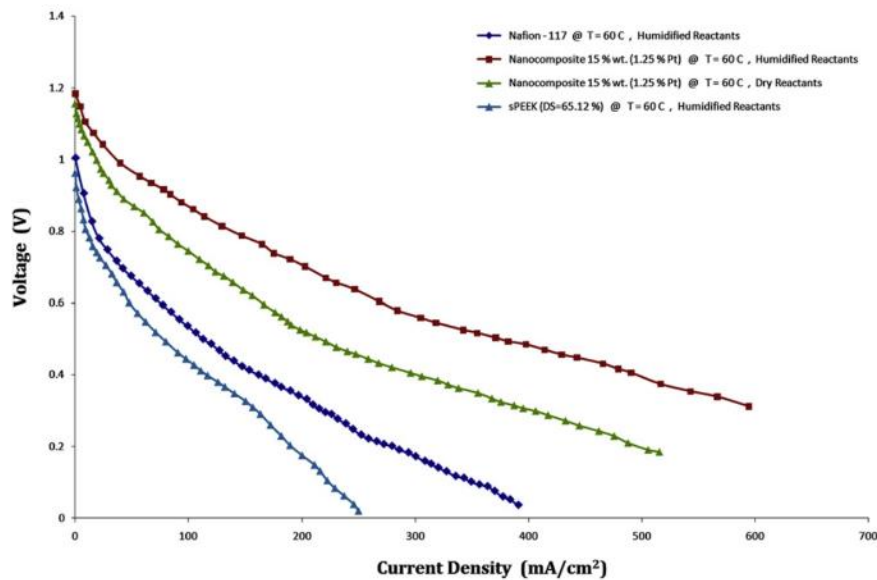


Figure 17. Different membrane materials and testing performance.

The cost and the durability of PEMFCs under the wide range of operating conditions including Relative Humidity (RH) and temperature were studied by [5]. These comparisons are very useful in the current research to allow us to focus on SPEEK membrane rather than the Nafion membrane [70] and [30]. Also, the crossover during the low thickness of the membrane is another issue that causes hydrogen and oxygen to pass to the opposite side of the membrane which leads to accelerating degradation of PEMFCs. The Transport Performance Index (TPI) has been defined as the ratio of hydrogen

permeability and proton conductivity which is given by [5] as Eq. 16. Performance Index (TPI) has been defined as the ratio of hydrogen permeability and proton conductivity which is given by [5] as Eq. 16.

$$TPI = \frac{2. H_2 \text{ permeability}}{\text{proton permeability}} \left[\frac{\text{mols}}{\text{Pa} * S} \right] \tag{Eq. 16}$$

It was applied for a Nafion 117 membrane and a cross-linked homemade-SPEEK membrane as a function of pressure, temperature, and RA as shown in Figure . Not only this but the mechanical test was conducted as in Figure 18.

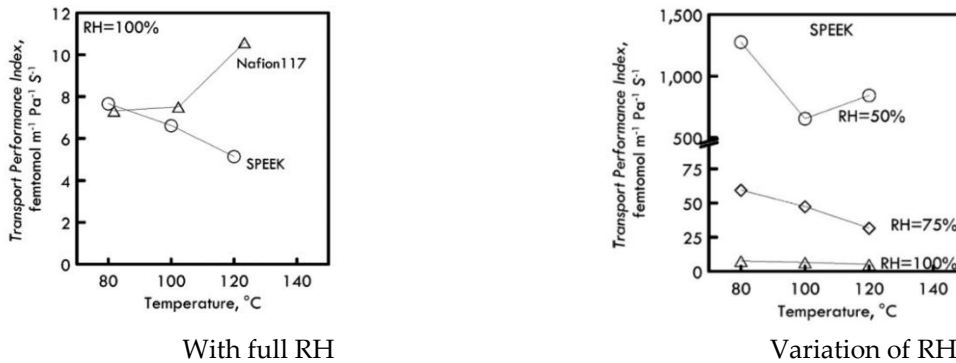


Figure 18. Comparison between Nafion-117 and SPEEK membranes performance by using transport performance index [5].

The article can discuss these results where the SPEEK membrane gave better performance even after 200 hours ($\cong 8 \text{ days}$). It would be useful to allow SPEEK to operate for a month or even more at 120 °C and determine the durability. For the current as far as I know, there is no measurement for the durability of the SPEEK membrane as the nanocomposite (15 wt.%) show better mechanical properties and more strength than SPEEK as shown in Figure 19.

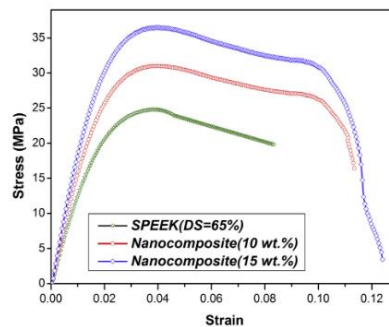


Figure 19. Testing the mechanical strength of different membranes materials [58].

PEMFCs are being developed mainly for transport applications due to compactness of the PEMFCs. It is considered the prime FCs for vehicles and mobile applications. The membrane must not be electrically conductive to avoid half-reaction mix [71,72]. When PEMFCs operate at 100 °C or above, the water byproduct becomes steam. The blockage due to condensation could be avoided. The limitations of PEMFCs are:

- Cost.
- Degradation.
- The critical point of water management.

The water management is a very challenging task in PEMFCs due to the slower of evaporating water leads to a flood of the membrane and accumulate the water inside the BPPs. On the other hand, the fast of evaporating water causes the drying of the membrane. In both cases, the degradation of performance of PEMFCs will occur. An electroosmotic pump was used as a solution on the 3D fine mesh of BPP

design as a solution adapted by Toyota company. Once the membrane is made from platinum, it may become sensitive to metal ions and it can be easily poisoned by carbon monoxide. But its high temperature the position of CO could be neglected.

6. Challenging to operate at the intermediate temperature

Nafion is most generally utilized for membrane. The Nafion depends on fluid water to humidify the membrane at low temperature. It is suitable at low temperature below 80°C but at a temperature above 80°C, the membrane becomes dry. The solution for this problem is using Polybenzimidazole (PBI), or Phosphoric Acid which allows the membrane to use without water management and come over the problem of no feasibility of using Nafion membrane. According to [73], using PBI for membrane help to increase power density and efficiency. Not only this but it can overcome of water management issue when the Nafion is used. While according to authors in references [74-80], the protic ionic liquids and protic organic ionic plastic crystal, allow using membrane at 100-200°C which are required to operate PEMFCs at intermediate temperature. The Thermogravimetric Analysis (TGA) curves in Figure 20 illustrate the thermal stability and decomposition behavior of various membrane materials compared to the benchmark Nafion 117 membrane.

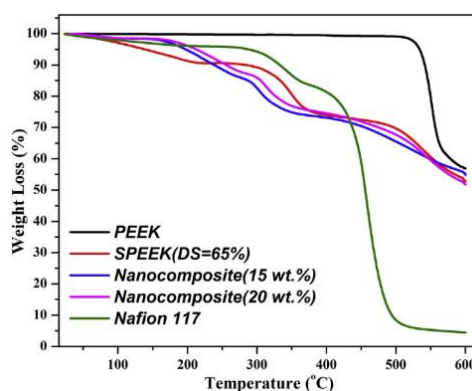


Figure 20. TGA curves of different materials for membranes compared with pure Nafion-117 membrane [58].

The results indicate that PEEK exhibits the highest thermal stability, with negligible weight loss up to 600°C, making it a robust candidate for high-temperature applications. In contrast, SPEEK (DS = 65%) begins to degrade around 300°C, reflecting the influence of sulfonation on its thermal resistance. The nanocomposite membranes (15 wt.% and 20 wt.%) demonstrate improved thermal stability over SPEEK, suggesting that the inclusion of nanomaterials enhances structural integrity and resistance to thermal decomposition. Meanwhile, Nafion 117 undergoes significant weight loss around 400°C, limiting its applicability in high-temperature proton exchange membrane fuel cells (HT-PEMFCs).

These findings underscore the superior thermal properties of PEEK-based membranes, particularly sulfonated and nanocomposite variations, which exhibit enhanced stability compared to Nafion 117. The delayed decomposition of nanocomposite membranes highlights the effectiveness of nanomaterial reinforcement in mitigating thermal degradation, making them promising alternatives for advanced HT-PEM fuel cell applications. By contrast, Nafion 117's lower thermal resistance restricts its use to lower operating temperatures, reinforcing the necessity for alternative membrane materials in next-generation fuel cell technologies. This study emphasizes the critical role of material selection in optimizing PEM performance, particularly for applications demanding high thermal resilience and prolonged operational durability.

7. Conclusion

This study has provided a comprehensive investigation and modeling framework for Intermediate-Temperature Proton-Exchange Membrane Fuel Cells (IT-PEMFCs), emphasizing their potential for transport applications. Through an extensive review of state-of-the-art membrane materials, the research has identified key challenges and opportunities in optimizing fuel cell performance at elevated

temperatures. A primary focus has been placed on mitigating gas crossover losses, which, despite being minimal (1–3% fuel losses), remain a critical factor in efficiency. The study has further highlighted the superior reliability of nanocomposite membranes (15 wt.%) in sustaining PEMFC operations under intermediate-temperature conditions. The development of a theoretical IT-PEMFC model, currently an ongoing effort, serves as a foundation for future advancements in this field.

While the findings underscore the viability of IT-PEMFCs in transportation, several technical challenges persist, including enhancing proton conductivity, increasing tolerance to CO and other gas impurities, and improving overall system efficiency. Addressing these issues will require further experimental validation, advanced material engineering, and refined computational modeling techniques. As hydrogen-based energy solutions continue to gain momentum in the push for sustainable transportation, the insights from this research contribute to the advancement of next-generation fuel cell technologies. Future work should focus on bridging the gap between theoretical modeling and real-world applications, ensuring IT-PEMFCs achieve the durability, efficiency, and commercial scalability required for widespread deployment.

Author Contributions: Author has contributed significantly to the development and completion of this article.

Funding: This article received no external funding.

Data Availability Statement: Not applicable.

Acknowledgments: The authors would like to express their sincere gratitude to Department of Electrical and Electronic engineering, The Higher Institute of Engineering Technology Zliten- Libya, and Centre for Hydrogen and Fuel Cell Research, School of Chemical Engineering, The University of Birmingham, Edgbaston, Birmingham, UK, for their invaluable support and resources throughout the course of this research.

Conflicts of Interest: The author(s) declare no conflict of interest.

ORCID

Fathi Eltayeb Abukhres <https://orcid.org/0009-0006-6109-6415>

Ali Algaddaf <https://orcid.org/0000-0002-1104-2279>

Miloud Ouadi <https://orcid.org/0000-0003-1575-3163>

References

- [1]. S. M. Haile, D. A. Boysen, C. R. Chisholm, and R. B. Merle, "Solid acids as fuel cell electrolytes," *Nature*, vol. 410, pp. 910–913, 2001.
- [2]. S. J. Peighambaroust, S. Rowshanzamir, M. G. Hosseini, and M. Yazdanpour, "Self-humidifying nanocomposite membranes based on sulfonated poly(ether ether ketone) and heteropolyacid supported Pt catalyst for fuel cells," *International Journal of Hydrogen Energy*, vol. 36, pp. 10940–10957, 2011.
- [3]. M. M. Norddin et al., "Characterization and performance of proton exchange membranes for direct methanol fuel cell: Blending of sulfonated poly(ether ether ketone) with charged surface modifying macromolecule," *Journal of Membrane Science*, vol. 323, pp. 404–413, 2008.
- [4]. "Hydrogen Production: Electrolysis," U.S. Department of Energy, 2020. [Online]. Available: <https://www.energy.gov/eere/fuelcells/hydrogen-production-electrolysis#:~:text=Electrolysis%20is%20a%20promising%20option,a%20unit%20called%20an%20electrolyzer.> [Accessed: Mar. 10, 2020].
- [5]. A. Brunetti et al., "New approach for the evaluation of membranes transport properties for polymer electrolyte membrane fuel cells," *Journal of Power Sources*, vol. 205, pp. 222–230, 2012.
- [6]. J. Wu et al., "A review of PEM fuel cell durability: Degradation mechanisms and mitigation strategies," *Journal of Power Sources*, vol. 184, pp. 104–119, 2008.
- [7]. S. Zhang et al., "A review of platinum-based catalyst layer degradation in proton exchange membrane fuel cells," *Journal of Power Sources*, vol. 194, pp. 588–600, 2009.
- [8]. S. S. Kocha, D. Yang, and J. S. Yi, "Characterization of gas crossover and its implications in PEM fuel cells," *AIChE Journal*, vol. 52, pp. 1916–1925, 2006.

- [9]. G. Barbieri et al., "LoLiPEM: Long life proton exchange membrane fuel cells," *International Journal of Hydrogen Energy*, vol. 41, pp. 1921–1934, 2016.
- [10]. E. Fontananova et al., "Stabilization of Sulfonated Aromatic Polymer (SAP) Membranes Based on SPEEK-WC for PEMFCs," *Fuel Cells*, vol. 13, pp. 86–97, 2013.
- [11]. D. Xing, B. Yi, F. Liu, Y. Fu, and H. Zhang, "Characterization of sulfonated poly(ether ether ketone)/polytetrafluoroethylene composite membranes for fuel cell applications," *Fuel Cells*, vol. 5, pp. 406–411, 2005.
- [12]. J. Peron et al., "Properties of Nafion® NR-211 membranes for PEMFCs," *Journal of Membrane Science*, vol. 356, pp. 44–51, 2010.
- [13]. S. J. Zaidi, *Research trends in polymer electrolyte membranes for PEMFC*, in *Polymer Membranes for Fuel Cells*. Springer, 2009.
- [14]. M. Watanabe, H. Uchida, Y. Seki, M. Emori, and P. Stonehart, "Self-humidifying polymer electrolyte membranes for fuel cells," *Journal of the Electrochemical Society*, vol. 143, pp. 3847, 1996.
- [15]. M. Amjadi et al., "Investigation of physical properties and cell performance of Nafion/TiO₂ nanocomposite membranes for high-temperature PEM fuel cells," *International Journal of Hydrogen Energy*, vol. 35, pp. 9252–9260, 2010.
- [16]. M. Watanabe, H. Uchida, and M. Emori, "Analyses of self-humidification and suppression of gas crossover in Pt-dispersed polymer electrolyte membranes for fuel cells," *Journal of the Electrochemical Society*, vol. 145, pp. 1137, 1998.
- [17]. M. Khaleel, M. R. Adzman, S. M. Zali, M. M. Graisa, and A. A. Ahmed, "A review of fuel cell to distribution network interface using D-FACTS: Technical challenges and interconnection trends," *Int. J. Electr. Electron. Eng. Telecommun.*, pp. 319–332, 2021.
- [18]. M. Khaleel et al., "An optimization approaches and control strategies of hydrogen fuel cell systems in EDG-integration based on DVR technology," *J. Eur. Syst. Autom.*, vol. 57, no. 2, pp. 551–565, 2024.
- [19]. M. Misono et al., "Catalysis by Heteropoly Compounds. III. The Structure and Properties of 12-Heteropolyacids of Molybdenum and Tungsten (H₃PMo₁₂- x W x O₄₀) and Their Salts Pertinent to Heterogeneous Catalysis," *Bulletin of the Chemical Society of Japan*, vol. 55, pp. 400–406, 1982.
- [20]. L. E. Karlsson and P. Jannasch, "Polysulfone ionomers for proton-conducting fuel cell membranes: 2. Sulfophenylated polysulfones and polyphenylsulfones," *Electrochimica Acta*, vol. 50, pp. 1939–1946, 2005.
- [21]. Y.-L. Ma, J. Wainright, M. Litt, and R. Savinell, "Conductivity of PBI membranes for high-temperature polymer electrolyte fuel cells," *Journal of the Electrochemical Society*, vol. 151, p. A8, 2003.
- [22]. X. Jin, M. T. Bishop, T. S. Ellis, and F. E. Karasz, "A sulphonated poly(aryl ether ketone)," *British Polymer Journal*, vol. 17, no. 4, 1985.
- [23]. Y. Shen et al., "Intermediate-temperature, non-humidified proton exchange membrane fuel cell with a highly proton-conducting Fe_{0.4}Ta_{0.5}P₂O₇ electrolyte," *Electrochemistry Communications*, vol. 24, pp. 82–84, 2012.
- [24]. P. Krishnan, J.-S. Park, and C.-S. Kim, "Preparation of proton-conducting sulfonated poly(ether ether ketone)/boron phosphate composite membranes by an in situ sol-gel process," *Journal of Membrane Science*, vol. 279, pp. 220–229, 2006.
- [25]. K. Kreuer, "On the development of proton conducting materials for technological applications," *Solid State Ionics*, vol. 97, pp. 1–15, 1997.
- [26]. K. Kreuer, "On the development of proton conducting polymer membranes for hydrogen and methanol fuel cells," *Journal of Membrane Science*, vol. 185, pp. 29–39, 2001.
- [27]. G. Ye, C. Mills, and G. Goward, "Influences of casting solvents on proton dynamics within sulfonated polyether ether ketones (S-PEEKs) studied using high-resolution solid-state NMR," *Journal of Membrane Science*, vol. 319, pp. 238–243, 2008.

- [28]. M. Khaleel, Z. Yusupov, N. Alderoubi, R. L. Abdul_jabbar, M. Elmnifi, Y. Nassar, H. S. Majdi, L. J. Habeeb, and S. Abulifa, "Evolution of Emissions: The Role of Clean Energy in Sustainable Development," *Chall. Sustain.*, vol. 12, no. 2, pp. 122-135, 2024.
- [29]. C. Bao and W. G. Bessler, "Two-dimensional modeling of a polymer electrolyte membrane fuel cell with long flow channel. Part II. Physics-based electrochemical impedance analysis," *Journal of Power Sources*, vol. 278, pp. 675–682, 2015.
- [30]. A. Ibrahim, O. Hossain, J. Chaggar, R. Steinberger-Wilckens, and A. El-Kharouf, "GO-Nafion composite membrane development for enabling intermediate temperature operation of polymer electrolyte fuel cell," *International Journal of Hydrogen Energy*, vol. 45, pp. 5526–5534, 2020.
- [31]. C. Francia, V. S. Ijeri, S. Specchia, and P. Spinelli, "Estimation of hydrogen crossover through Nafion® membranes in PEMFCs," *Journal of Power Sources*, vol. 196, pp. 1833–1839, 2011.
- [32]. J. Zaidi and T. Matsuura, *Polymer Membranes for Fuel Cells*. Springer, 2008.
- [33]. N. Ghasem and R. Henda, *Principles of Chemical Engineering Processes: Material and Energy Balances*, 2nd ed. Taylor & Francis, 2014.
- [34]. J. C. Whitwell and R. K. Toner, *Conservation of Mass and Energy*. McGraw-Hill Companies, 1973.
- [35]. G. V. Reklaitis and D. R. Schneider, *Introduction to Material and Energy Balances*. Wiley, 1983.
- [36]. J. Larminie, A. Dicks, and M. S. McDonald, *Fuel Cell Systems Explained*. Wiley, 2003.
- [37]. P. Knauth and M. L. Di Vona, *Solid State Proton Conductors: Properties and Applications in Fuel Cells*. Wiley, 2012.
- [38]. A. Ray, I. Mukhopadhyay, and R. K. Pati, *Electrocatalysts for Fuel Cells and Hydrogen Evolution: Theory to Design*. BoD–Books on Demand, 2018.
- [39]. University of Cambridge, Department of Chemical Engineering and Biotechnology, "Mass Transport," 2021. [Online]. Available: <https://www.ceb.cam.ac.uk/research/groups/rg-eme/Edu/mass-transport>. [Accessed: Jan. 2, 2021].
- [40]. G. Alberti, M. Di Vona, and R. Narducci, "New results on the visco-elastic behaviour of ionomer membranes and relations between T–RH plots and proton conductivity decay of Nafion® 117 in the range 50–140°C," *International Journal of Hydrogen Energy*, vol. 37, pp. 6302–6307, 2012.
- [41]. G. Alberti, M. Casciola, L. Massinelli, and B. Bauer, "Polymeric proton conducting membranes for medium temperature fuel cells (110-160°C)," *Journal of Membrane Science*, vol. 185, pp. 73–81, 2001.
- [42]. G. Alberti, M. Casciola, L. Massinelli, and B. Bauer, "Polymeric proton conducting membranes for medium temperature fuel cells (110–160°C)," *Journal of Membrane Science*, vol. 185, pp. 73–81, 2001.
- [43]. O. Savadogo, "Emerging membranes for electrochemical systems: Part II. High-temperature composite membranes for polymer electrolyte fuel cell (PEFC) applications," *Journal of Power Sources*, vol. 127, pp. 135–161, 2004.
- [44]. W. Vielstich, A. Lamm, and H. A. Gasteiger, *Handbook of Fuel Cells: Fundamentals Technology and Applications*. Wiley, 2003.
- [45]. C. Yang, P. Costamagna, S. Srinivasan, J. Benziger, and A. B. Bocarsly, "Approaches and technical challenges to high temperature operation of proton exchange membrane fuel cells," *Journal of Power Sources*, vol. 103, pp. 1–9, 2001.
- [46]. M. Casciola, G. Alberti, M. Sganappa, and R. Narducci, "On the decay of Nafion proton conductivity at high temperature and relative humidity," *Journal of Power Sources*, vol. 162, pp. 141–145, 2006.
- [47]. G. Alberti and R. Narducci, "Evolution of permanent deformations (or memory) in Nafion 117 membranes with changes in temperature, relative humidity and time, and its importance in the development of medium temperature PEMFCs," *Fuel Cells*, vol. 9, pp. 410–420, 2009.
- [48]. S. Yun, H. Im, Y. Heo, and J. Kim, "Crosslinked sulfonated poly(vinyl alcohol)/sulfonated multi-walled carbon nanotubes nanocomposite membranes for direct methanol fuel cells," *Journal of Membrane Science*, vol. 380, pp. 208–215, 2011.

- [49]. B. Maranesi et al., "Cross-linking of sulfonated poly(ether ether ketone) by thermal treatment: How does the reaction occur?," *Fuel Cells*, vol. 13, pp. 107–117, 2013.
- [50]. G. Alberti, R. Narducci, M. L. Di Vona, and S. Giancola, "Annealing of Nafion 1100 in the presence of an annealing agent: A powerful method for increasing ionomer working temperature in PEMFCs," *Fuel Cells*, vol. 13, pp. 42–47, 2013.
- [51]. S. Slade, S. Campbell, T. Ralph, and F. Walsh, "Ionic conductivity of an extruded Nafion 1100 EW series of membranes," *Journal of the Electrochemical Society*, vol. 149, p. A1556, 2002.
- [52]. A. Iulianelli and A. Basile, "Sulfonated PEEK-based polymers in PEMFC and DMFC applications: A review," *International Journal of Hydrogen Energy*, vol. 37, pp. 15241–15255, 2012.
- [53]. T. Kobayashi, M. Rikukawa, K. Sanui, and N. Ogata, "Proton-conducting polymers derived from poly(ether-ether-ketone) and poly(4-phenoxybenzoyl-1,4-phenylene)," *Solid State Ionics*, vol. 106, pp. 219–225, 1998.
- [54]. F. Ng et al., "Novel sulfonated poly(arylene ether benzimidazole) cardo proton conducting membranes for PEMFC," *Journal of Membrane Science*, vol. 362, pp. 184–191, 2010.
- [55]. R. Pedicini et al., "Sulphonated polysulphone membranes for medium temperature in polymer electrolyte fuel cells (PEFC)," *Polymer Testing*, vol. 27, pp. 248–259, 2008.
- [56]. S. Xue and G. Yin, "Methanol permeability in sulfonated poly(ether ether ketone) membranes: a comparison with Nafion membranes," *European Polymer Journal*, vol. 42, pp. 776–785, 2006.
- [57]. N. Intaraprasit and P. Kongkachuichay, "Preparation and properties of sulfonated poly(ether ether ketone)/Analcime composite membrane for a proton exchange membrane fuel cell (PEMFC)," *Journal of the Taiwan Institute of Chemical Engineers*, vol. 42, pp. 190–195, 2011.
- [58]. S. Rowshanzamir, S. J. Peighambardoust, M. J. Parnian, G. R. Amir Khanlou, and A. Rahnavard, "Effect of Pt-Cs₂.5H_{0.5}PW₁₂O₄₀ catalyst addition on durability of self-humidifying nanocomposite membranes based on sulfonated poly(ether ether ketone) for proton exchange membrane fuel cell applications," *International Journal of Hydrogen Energy*, vol. 40, pp. 549–560, 2015.
- [59]. P. Chippar and H. Ju, "Numerical modeling and investigation of gas crossover effects in high-temperature proton exchange membrane (PEM) fuel cells," *International Journal of Hydrogen Energy*, vol. 38, pp. 7704–7714, 2013.
- [60]. L. Xing et al., "Numerical study of the effect of relative humidity and stoichiometric flow ratio on PEM (proton exchange membrane) fuel cell performance with various channel lengths: An anode partial flooding modelling," *Energy*, vol. 106, pp. 631–645, 2016.
- [61]. R. B. Lakshmi, N. Harikrishnan, and A. V. Juliet, "Comparative analysis of 2D and 3D model of a PEMFC in COMSOL," *Applied Surface Science*, vol. 418, pp. 99–102, 2017.
- [62]. M. Haghayegh, M. H. Eikani, and S. Rowshanzamir, "Modeling and simulation of a proton exchange membrane fuel cell using computational fluid dynamics," *International Journal of Hydrogen Energy*, vol. 42, pp. 21944–21954, 2017.
- [63]. S. H. Mirfarsi, M. J. Parnian, and S. Rowshanzamir, "Self-Humidifying Proton Exchange Membranes for Fuel Cell Applications: Advances and Challenges," *Processes*, vol. 8, p. 1069, 2020.
- [64]. COMSOL Multiphysics, "Mass transport analysis of a high-temperature PEM fuel cell," 2011.
- [65]. E. Ubong, Z. Shi, and X. Wang, "Three-dimensional modeling and experimental study of a high temperature PBI-based PEM fuel cell," *Journal of The Electrochemical Society*, vol. 156, p. B1276, 2009.
- [66]. F. Beyraghi, S. H. Mirfarsi, S. Rowshanzamir, A. Karimi, and M. J. Parnian, "Optimal thermal treatment conditions for durability improvement of highly sulfonated poly(ether ether ketone) membrane for polymer electrolyte fuel cell applications," *International Journal of Hydrogen Energy*, vol. 45, pp. 13441–13458, 2020.
- [67]. X. Liu, S. He, Z. Shi, L. Zhang, and J. Lin, "Effect of residual casting solvent content on the structure and properties of sulfonated poly(ether ether ketone) membranes," *Journal of Membrane Science*, vol. 492, pp. 48–57, 2015.
- [68]. M. Mohammadi and S. Mehdipour-Ataei, "Durable sulfonated partially fluorinated polysulfones as membrane for PEM fuel cell," *Renewable Energy*, vol. 158, pp. 421–430, 2020.

- [69]. F. Sun et al., "Friedel-Crafts self-crosslinking of sulfonated poly(etheretherketone) composite proton exchange membrane doped with phosphotungstic acid and carbon-based nanomaterials for fuel cell applications," *Journal of Membrane Science*, vol. 611, p. 118381, 2020.
- [70]. G. G. Gagliardi, A. Ibrahim, D. Borello, and A. El-Kharouf, "Composite Polymers Development and Application for Polymer Electrolyte Membrane Technologies – A Review," *Molecules*, vol. 25, p. 1712, 2020.
- [71]. B. Millington, S. Du, and B. G. Pollet, "The effect of materials on proton exchange membrane fuel cell electrode performance," *Journal of Power Sources*, vol. 196, pp. 9013–9017, 2011.
- [72]. Y. Wang and K. S. Chen, *PEM Fuel Cells: Thermal and Water Management Fundamentals*. Momentum Press, 2013.
- [73]. J. S. Lee et al., "Polymer electrolyte membranes for fuel cells," *Journal of Industrial and Engineering Chemistry*, vol. 12, pp. 175, 2006.
- [74]. M. M. Khaleel, Z. Yusupov, M. T. Güneşer, A. A. Abulifa, A. A. Ahmed and A. Alsharif, "The Effect of PEMFC on Power Grid Using Advanced Equilibrium Optimizer and Particle Swarm Optimisation for Voltage Sag Mitigation," *2023 IEEE 3rd International Maghreb Meeting of the Conference on Sciences and Techniques of Automatic Control and Computer Engineering (MI-STA)*, Benghazi, Libya, 2023, pp. 755-760.
- [75]. J. Luo et al., "Protic ionic liquid and ionic melts prepared from methanesulfonic acid and 1H-1,2,4-triazole as high temperature PEMFC electrolytes," *Journal of Materials Chemistry*, vol. 21, pp. 10426–10436, 2011.
- [76]. M. Khaleel, Z. Yusupov, M. Guneser, H. El-Khozondar, A. Ahmed, and A. A. Alsharif, "Towards hydrogen sector investments for achieving sustainable electricity generation," *jsesd*, vol. 13, no. 1, pp. 71–96, 2024.
- [77]. J. Luo et al., "1,2,4-Triazolium perfluorobutanesulfonate as an archetypal pure protic organic ionic plastic crystal electrolyte for all-solid-state fuel cells," *Energy & Environmental Science*, vol. 8, pp. 1276–1291, 2015.
- [78]. M. Khaleel, Z. Yusupov, A. Ahmed, A. Alsharif, Y. Nassar, and H. El-Khozondar, "Towards sustainable renewable energy," *Appl. Sol. Energy*, vol. 59, no. 4, pp. 557–567, 2023.
- [79]. J. Luo, O. Conrad, and I. F. Vankelecom, "Imidazolium methanesulfonate as a high temperature proton conductor," *Journal of Materials Chemistry A*, vol. 1, pp. 2238–2247, 2013.
- [80]. M. M. Khaleel, M. R. Adzman, and S. M. Zali, "An integrated of hydrogen fuel cell to distribution network system: Challenging and opportunity for D-STATCOM," *Energies*, vol. 14, no. 21, p. 7073, 2021.



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third-party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2025